

ASSEMBLY INSTRUCTIONS OF KULKUKOIRA-GATE

For tools, you need a 5 mm Allen key and a 10 mm spanner. For a divider mounting, you will also need a 6 mm Allen key and a 13 mm spanner.

1. Lift the frame up while holding the skids against the floor, and place the bolts in their holes (marked with white). **Install the divider first before tightening the nuts!**

2. Place the divider behind the middle bar. If there is a threshold in the luggage compartment, lift the gate inside the car first, before installing the divider.

3. If divider hits to the safety net above rear seats, you should cut piece from divider to make it fit. We always measure cars without safety nets.

4. Screw the adjustment fooks into the thread. Hold the adjustment foot at one end and tighten the plastic handwheel tightly. Glue the velcro straps at the ends of the adjustment fooks.

5. Adjust the brackets so that the adjustment fooks are at a 90 degree angle to the roof. If the bracket does not fit between the roof and the gate, install the metal plates below the press sections. Tighten the hexagonal bolts tight enough. If the brackets begin to lower down when tightening the adjustment fooks, the bolts are not sufficiently tight.

Tighten the gate against the roof ceiling, evenly on both sides. By testing you know when the tightening is enough. Do not use tools to tighten. **Install the divider first before tightening the adjustment fooks!**


The fasteners may slack with time, so check the fastening periodically and tighten the bolts as needed. Keep the Allen key always in your car!

Kulkukoira-gate can also be attached with small straps to anchor points of car.

6. Try latching. The tightness is appropriate when there is no clearance between the latch and the frame. You can adjust tightness by carefully bending stopping plates inward or outward with palm of your hand or with pliers. The door in appropriate tightness doesn't make noise even when driving roads in bad condition.

Do not tighten too much extremely angular gates (e.g : Audi A4, BMW 5 Series, Kia Ceed, Skoda Octavia and Superb, Volvo XC60 and V90). For those cars, it is best to use an additional attachment with velcro straps between adjustment fooks and roof ceiling.

Volvo V40, V60 and Kia Rio: In these car models, the gates are hinged in a non-standard way due the shape of the luggage compartment. Never allow the doors to fall/close by their own weight!

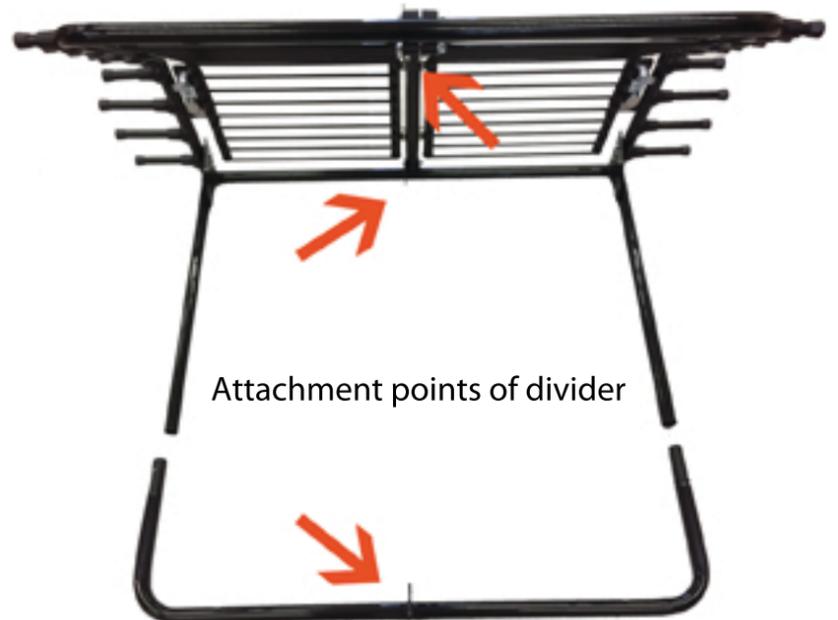

The top bracket of divider is turned aside for transportation!